

Fulflo® FCB Filter Vessels

- Carbon Steel
- 304 Stainless Steel

Bag Filter Vessel Series

FCB Model Bag Filter Vessels Designed for Economical Filtration of Liquids

Applications

- Incoming Process Water
- Discharge Water
- Coolants
- Cutting Oils
- Inks
- Lubricants
- Paints
- Resins
- Solvents




Features and Benefits

- Maximum design pressure is 100 psi (6.9 bar) at 200°F (94°C).
- Patented safety-latch design prevents inadvertent separation of the head from the shell in the event of improper venting prior to clamp removal.
- V-band clamp permits easy opening for bag changeout.
- 2 in NPT female connections.
- Standard features include air vent lock and adjustable leg height.
- Standard "C" style flex band bags available in 1µm thru 800µm.
- Standard Buna-N gasket with EPR, Viton* and fluoropolymer available.
- Stainless basket strainers available in 20, 40, 60, 80 and 100 mesh.
- Wall mounting bracket available.
- Optional hold-down assembly for conversion to "G" style bag media seal available.

Process Filtration Division



Bag Filter Vessel Series

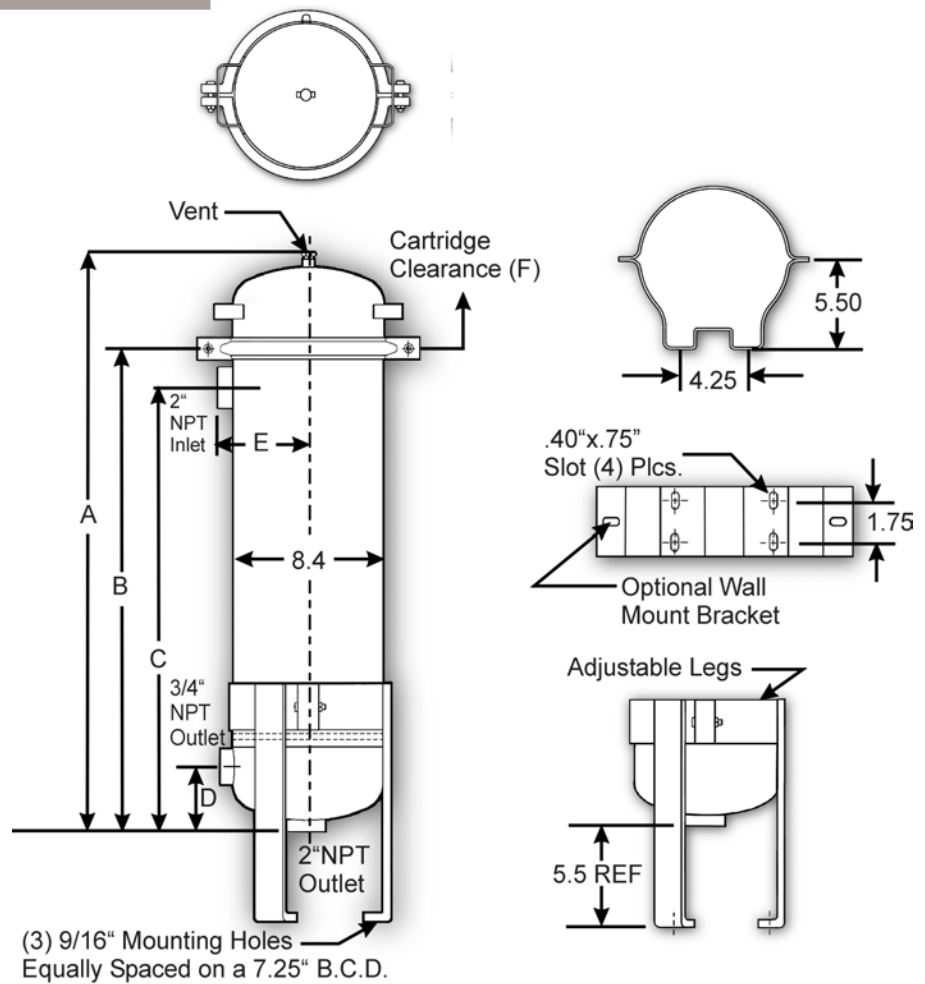

Design Specifications

Model	Material	Typical Aqueous Flow (gpm)	Dimensions (in)						Shipping Weight (lbs)
			A	B	C	D	E	F	
FCB11 [†]	Carbon Steel	80	30.00	24.00	21.38	3.75	4.88	16.00	35
FCB-12 ^{††}	Carbon Steel	100 ^{†††}	41.63	35.75	33.13	3.75	4.88	29.00	44
4FCB-11 [†]	304 SS	80	30.00	24.00	21.38	3.75	4.88	16.00	35
4FCB-12 ^{††}	304 SS	100 ^{†††}	41.63	35.75	33.13	3.75	4.88	29.00	44

[†] Uses "C" style single length bag.

^{††} Uses "C" style double length bag.

^{†††} Maximum recommended flow rate limited by 2 in NPT inlet.

Ordering Information

4	FCB	1	1	—	2
Material	Design Series	Number of Bags	Bag Length	Inlet/Outlet	Size
4 = 304 Stainless Steel No Symbol = Carbon Steel	FCB = Non-Code Design		1 = Single 2 = Double		

Process Filtration Division

* A trademark of E. I. du Pont de Nemours & Co.

Parker Hannifin Corporation
 Process Filtration Division
 6640 Intech Boulevard
 Indianapolis, Indiana 46278
 Toll Free 1-888-C-FULFLO (238-5356)
 Telephone (317) 275-8300
 Fax (317) 275-8410
<http://www.parker.com>

