

## GATB-Series Absolute Grade Meltblown Polypropylene

### GATB-Series Absolute Grade Meltblown

#### Polypropylene Filter Cartridges:

- Precision process control of fiber diameter and layer density tunes the media to achieve targeted retention efficiency and ensure consistent performance.
- All polypropylene construction presents excellent compatibility with a wide range of chemicals.
- Resists contaminant unloading, even at elevated differential pressures.
- All end configurations available (glued or thermally-bonded).
- Grooved exterior increases surface area.
- Easy cartridge incineration and disposal.
- Free of additives, wetting agents, binders and silicone.




### Construction Materials

**Filtration Media** ..... Polypropylene  
**End Caps** ..... Polypropylene  
**O-Rings/Gaskets** ..... Buna, EPDM, Polyfoam, Silicone, Viton®

### Operating Conditions

**Change Out ΔP (recommended)** ..... 35 PSID  
**Temperature (max)** ..... 140°F (60°C)  
**Differential Pressure (max)** ..... 50 PSID (3.4 bar) at 68°F (20°C)

### Flow Rate vs Pressure Drop

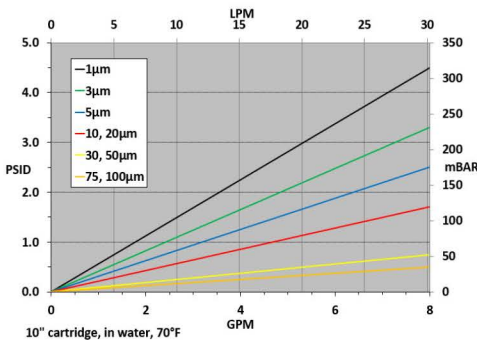

### Dimensions (Nominal)

**Length** ..... 9.75 to 40 inches (24.8 to 102 cm)  
**Outside Diameter** ..... 2.5 inches (6.4 cm)  
**Inside Diameter** ..... 1.06 inches (2.69 cm)

### Food Safety Compliance

Materials of construction comply with FDA regulations for food and beverage contact use as detailed in the US Code of Federal Regulations, 21CFR. Materials used to produce filter media and hardware are deemed safe for use in contact with foodstuffs in accordance with EU Directives 2002/72/EC, 1935/2004, and/or 10/2011.

### Performance Specifications

**Micron Ratings:**  
 1, 3, 5, 10, 20, 30, 50, 75, 100  
**Efficiencies:**  
 1-3 Micron: 95%  
 5-100 Micron: 99%



NSF Certification applies for use only with drinking water. Only products bearing the NSF Mark on the product, product packaging, and/or documentation shipped with the product are Certified. Product options denoted with asterisk (\*) are not included in the Certification.

Certified to NSF/ANSI/CAN 61

### Ordering Information

GATB	Rating (µ)	A	Length	-	End Cap Style	O-Rings/Gaskets	-	Adders
Absolute Grade	1		9.75" (24.76cm)		Blank = None	Blank = None		Blank = Glued or None
	3		9.875" (25.08 cm)		2 = DOE Flat Gasket	B = Buna		CS = 316SS Compression Spring (TB ONLY)
	5		10" (25.4 cm)		3 = 222 w/Fin	E = EPDM		PC = Polypropylene Core
	10		19.5" (49.53 cm)		4 = 222 w/Flat Cap	P = Polyfoam (Gaskets) *		TB = Thermally-Bonded
	20		20" (50.8 cm)		5 = 222 w/Spring	S = Silicone		
	30		29.25" (74.29 cm)		6 = 226 w/Flat Cap	V = Viton® *		
	50		29.5" (74.93 cm)		7 = 226 w/Fin			
	75		30" (76.2 cm)		8 = 226 w/Spring			
	100		39" (99.1 cm)		9 = SOE w/ Spring			
			40" (101.6 cm)		10 = DOE w/PP Core Extender			
					16 = 213 Internal O-Ring			
					20 = SOE PP Ext. w/Spring			

DISCLAIMER: Filtration data presented is representative of performance observed in controlled laboratory testing. It is not given as a warranty, specification or statement of fitness for use. Specific performance can vary widely depending on contaminant type, fluid properties, flow rates and environmental conditions. It is recommended that users conduct thorough qualification testing to assure the product functions as required. For additional technical support, a product Performance Guide is available upon request.